



KTEB-113-1-TP-SN-MB /A

T5 ELECTRONIC FLUORESCENT



RoHS Compliant



PRODUCT FEATURES



STARTING METHOD: Rapid	INPUT VOLTAGE: 120VAC ±10%	WARRANTY: 3 Years
LAMP CONNECTION: --	INPUT FREQUENCY: 60Hz	POWER FACTOR: Normal

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection Meets ANSI/IEEE62.41 Cat. A
- Lamp end-of-life protected

ELECTRICAL SPECIFICATIONS

LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD%	WIRING DIAGRAM
F13T5	1	120	15.0	0.25	0.50	1.45	0.95	6.33	150	F1-6
F8T5	1	120	10.2	0.17	0.50	1.58	1.00	9.25	150	F1-6
CFQ13W/G24q	1	120	15.0	0.25	0.50	1.46	0.90	6.33	150	P1-1

WIRING DIAGRAMS

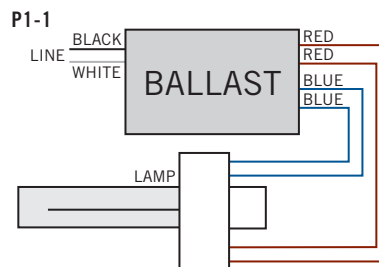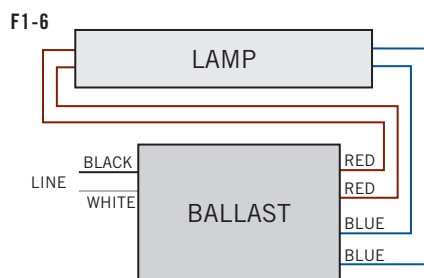




KTEB-113-1-TP-SN-MB /A

T5 ELECTRONIC FLUORESCENT

CASE STYLE/DIMENSIONS

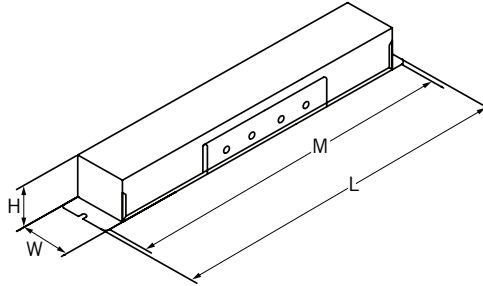

CASE DIMENSIONS


LENGTH: 6.46"
WIDTH: 1.61"
HEIGHT: 1.00"
MOUNTING: 6.00"
UNIT WEIGHT: 1.00 lbs

STANDARD LEAD LENGTHS*

BLACK: 11.00"
WHITE: 11.00"
BLUE: 22.00" X 22.00"
RED: 4.00" X 4.00"

*Consult Keystone for special lead length requirements.

HOT SPOT LOCATION

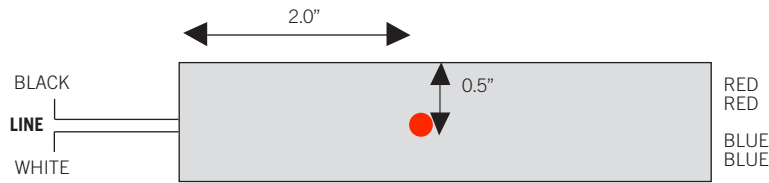

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-113-1-TP-SN-MB/A		1	Active

CATALOG NUMBER BREAKDOWN

KTEB-113-1-TP-SN-MB/A

