



KTEB-135HE-1-TP

T5 ELECTRONIC BALLAST



DESCRIPTION

1x F35T5 | 120V | Normal Power Factor

STARTING METHOD: Rapid
INPUT VOLTAGE: 120VAC ±10%
INPUT FREQUENCY: 50/60 Hz
BALLAST FACTOR (LIGHT OUTPUT): Normal
WARRANTY: 3 Years



PRODUCT FEATURES


- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class B) Consumer Limits
- Transient Protection Meets ANSI/IEEE C62.41 Cat. A
- Lamp End-of-Life Protected

ELECTRICAL SPECIFICATIONS

LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD	WIRING DIAGRAM
F35T5	1	120	33	0.48	0.57	<1.70	0.88	2.67	125	F1-6
F28T5	1	120	27	0.40	0.55	<1.70	0.92	3.41	135	F1-6
F21T5	1	120	22	0.34	0.53	<1.70	1.00	4.54	140	F1-6

WIRING DIAGRAMS

F1-6

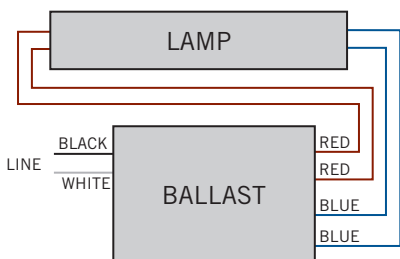




KTEB-135HE-1-TP

T5 ELECTRONIC BALLAST

MECHANICAL SPECIFICATIONS

CASE DIMENSIONS



LENGTH	9.00"
WIDTH	0.95"
HEIGHT	0.95"
MOUNTING	8.75"
CASE STYLE	N1

STANDARD LEAD LENGTHS*

BLACK	24"
WHITE	24"
BLUE	34"
RED	46"

*Consult Keystone for special lead length requirements.

CATALOG NUMBER BREAKDOWN

ORDER CODE	PACKAGING STYLE	PACKAGE QUANTITY	ITEM STATUS
KTEB-135HE-1-TP /B-CP	Carton	120	Active

CATALOG NUMBER BREAKDOWN

KTEB-135HE-1-TP /B-CP

