

# SPECIFICATION SHEET: WH3-277-L

This Is An Original Product From Fulham Co., Inc

Description: WorkHorse Series Versatile, Solid State Electronic Ballast. Small Case Size,


High Power Factor, Light Weight, Also Available In 120/230/277V 50/60 Hz.

This Ballast Will Operate Following Lamps.

**REFER TO LAMP WATTS/TYPE** 

## **ELECTRICAL DATA (277V APPLICATIONS)**

INPUT VOLT: 277V ± 10%,	50/60Hz								
LAMP WATTS/TYPE	54WT5HO	* F32T8	* F32T8	CFQ26W	CR32W	CFQ26W	CFQ18W	CFQ18W	
LAMPS OPERATED	1	1	2	2	1	2	1	2	
INPUT WATTS	57	38	62	47	28	47	25	41	
LINE CURRENT:	0.22	0.16	0.24	0.19	0.13	0.19	0.11	0.16	
POWER FACTOR	0.92	0.88	0.93	0.92	0.81	0.92	0.90	0.92	
BALLAST FACTOR	0.92	1.17	1.00	0.87	0.87	0.87	1.17	1.05	
EFFICACY FACTOR	1.63	3.04	1.61	1.84	3.09	1.84	4.75	2.59	
THD	33%	33%	33%	34%	36%	36%	38%	37%	
EMI/RFI COMPLIANCE			FCC	PART 18-A	(Non-Consu	mer)	-		
SOUND RATING		"A"							
BALLAST TYPE		7		INSTAN	T START				
VOLTAGE TRANSIENTS				ANSI	62.41				
INPUT/PROTECTION					JSE				
MIN. OPERATING TEMP		-30 °C (-20 °F)							
MAX. CASE TEMP		70 °C (158 °F)							
APPROVALS/CLASS			UL LIST	ED, CLASS "	P ", 1 OR 2 O	JTDOOR			
APPROVALS/CLASS			* UL /cUL LI	STED, CLAS	S " P ", 1 OR 2	OUTDOOR			

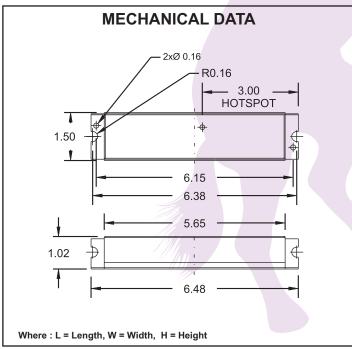

WIRING DIAGRAMS									
WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN			
LENGTH - INCHES	12 <u>+</u> 1"	12 <u>+</u> 1"	36 <u>+</u> 1"	-	36 <u>+</u> 1"	-			

FOR WIRING DIAGRAM, PLEASE REFER TO FULHAM'S CATALOG

NOTE: This Ballast Must Be Grounded

Fulham Co., Inc extends limited warranty only to the original purchaser or to the first user for the period of 5 years from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR <u>call Customer Service at 1-323-599-5000</u>.

DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.



# SPECIFICATION SHEET: WH3-277-L

This Is An Original Product From Fulham Co., Inc

Description: WorkHorse Series Versatile, Solid State Electronic Ballast. Small Case Size,


High Power Factor, Light Weight, Also Available In 120/230/277V 50/60 Hz.

This Ballast Will Operate Following Lamps.

**REFER TO LAMP WATTS/TYPE** 

## **ELECTRICAL DATA (277V APPLICATIONS)**

INPUT VOLT: 277V ± 10%,	50/60Hz									
LAMP WATTS/TYPE	CFT13W	CFT13W	CFTR18W	CFTR26W	CFTR26W	CFTR32W	CFTR32W	CFTR42W		
LAMPS OPERATED	1	2	2	1	2	1	2	1		
INPUT WATTS	17	26	24	27	44	32	53	42		
LINE CURRENT:	0.09	0.11	0.11	0.12	0.18	0.14	0.21	0.17		
POWER FACTOR	0.90	0.90	0.90	0.90	0.90	0.90	0.90	0.90		
BALLAST FACTOR	0.97	0.88	1.14	0.90	0.80	0.60	0.73	0.83		
EFFICACY FACTOR	5.78	3.33	4.74	3.30	1.80	1.86	1.38	1.97		
THD	39%	37%	38%	37%	34%	36%	32%	34%		
EMI/RFI COMPLIANCE			FCC	PART 18-A	(Non-Consur	mer)				
SOUND RATING				"	A "					
BALLAST TYPE				INSTAN'	T START					
VOLTAGE TRANSIENTS				ANSI	62.41					
INPUT/PROTECTION					JSE					
MIN. OPERATING TEMP		-30 <sup>0</sup> C (-20 <sup>0</sup> F )								
MAX. CASE TEMP		70 °C ( 158 ° F )								
APPROVALS/CLASS			UL LISTI	ED, CLASS "	P ", 1 OR 2 OI	JTDOOR				
APPROVALS/CLASS			* UL /cUL LI	STED, CLAS	S " P ", 1 OR 2	OUTDOOR				

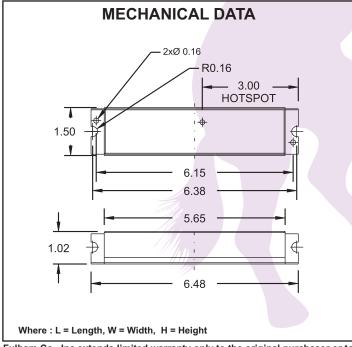

WIRING DIAGRAMS								
WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN		
LENGTH - INCHES	12 <u>+</u> 1"	12 <u>+</u> 1"	36 <u>+</u> 1"	-	36 <u>+</u> 1"	-		

FOR WIRING DIAGRAM, PLEASE REFER TO FULHAM'S CATALOG

NOTE: This Ballast Must Be Grounded

Fulham Co., Inc extends limited warranty only to the original purchaser or to the first user for the period of 5 years from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR <u>call Customer Service at 1-323-599-5000</u>.

DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.



# SPECIFICATION SHEET: WH3-277-L

This Is An Original Product From Fulham Co., Inc


Description : WorkHorse Series Versatile, Solid State Electronic Ballast. Small Case Size, High Power Factor, Light Weight, Also Available In 120/230/277V 50/60 Hz.

This Ballast Will Operate Following Lamps.

**REFER TO LAMP WATTS/TYPE** 

### **ELECTRICAL DATA (277V APPLICATIONS)**

INPUT VOLT: 277V ± 10%, 50/60Hz									
LAMP WATTS/TYPE	* CR40WT9	F39T5HO	*F17T8	F24T5HO					
LAMPS OPERATED	1	1	2	2					
INPUT WATTS	37	37	36	41					
LINE CURRENT:	0.16	0.15	0.14	0.16					
POWER FACTOR	0.90	0.86	0.93	0.93					
BALLAST FACTOR	0.94	0.79	1.10	0.80					
EFFICACY FACTOR	2.58	2.16	3.06	1.97					
THD	35%	36%	35%	34%					
EMI/RFI COMPLIANCE			FCC	PART 18-A (	Non-Consun	ner)			
SOUND RATING		"A"							
BALLAST TYPE		1/1		INSTANT	START				
VOLTAGE TRANSIENTS				ANSI	62.41				
INPUT/PROTECTION				FU:					
MIN. OPERATING TEMP	-30 °C (-20 °F )								
MAX. CASE TEMP				70 °C ( 1	158 <sup>0</sup> F )			<u> </u>	
APPROVALS/CLASS		UL LISTED, CLASS " P ", 1 OR 2 OUTDOOR							
APPROVALS/CLASS			* UL /cUL LI	STED, CLASS	" P ", 1 OR 2	OUTDOOR			

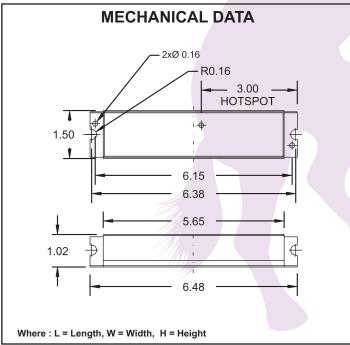

WIRING DIAGRAMS								
WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN		
LENGTH - INCHES	12 <u>+</u> 1"	12 <u>+</u> 1"	36 <u>+</u> 1"	-	36 <u>+</u> 1"	-		

FOR WIRING DIAGRAM,
PLEASE REFER TO FULHAM'S CATALOG

NOTE : This Ballast Must Be Grounded

Fulham Co., Inc extends limited warranty only to the original purchaser or to the first user for the period of <u>5 years</u> from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR <u>call Customer Service at 1-323-599-5000</u>.

DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.